


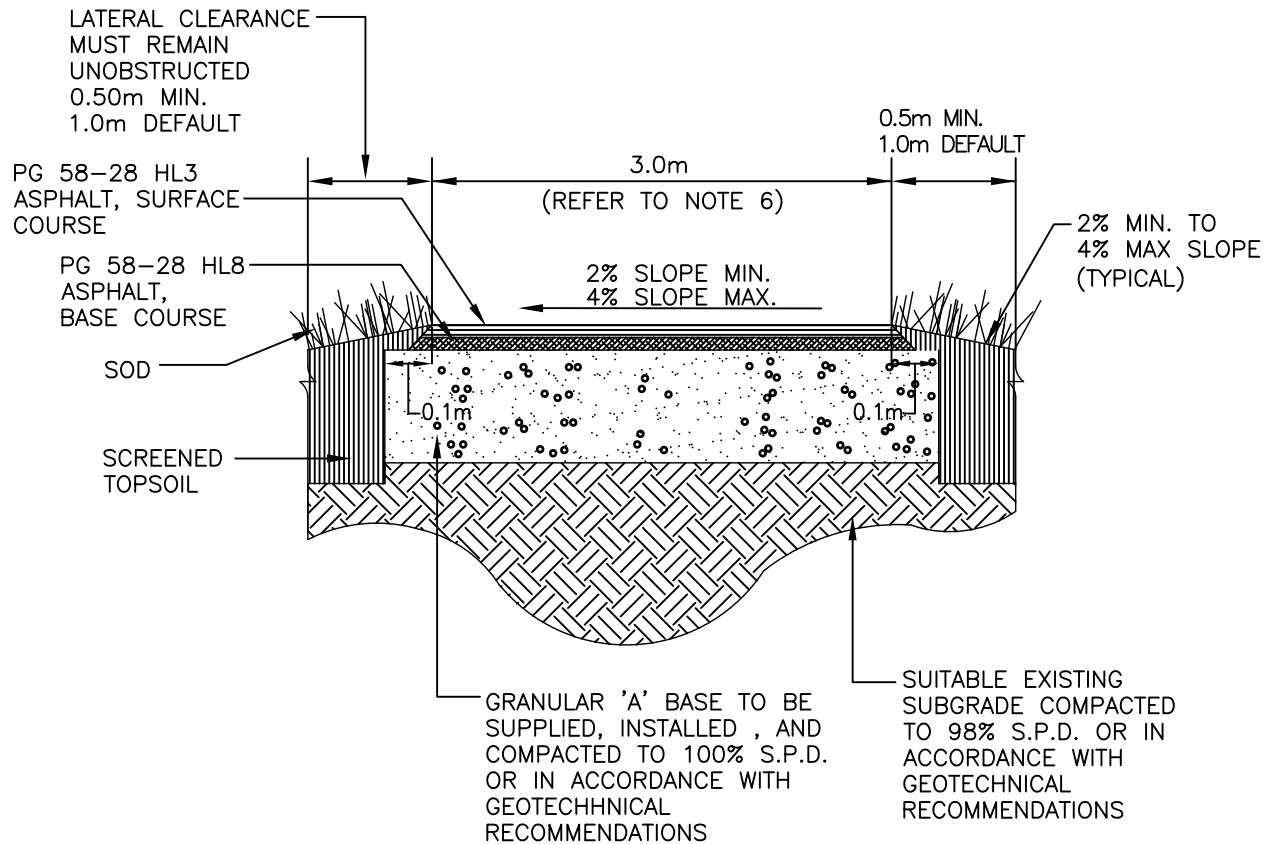

MATERIAL DEPTH REQUIREMENTS

40mm	HL3 SURFACE ASPHALT PG 58-28
40mm	HL8 BASE ASPHALT PG 58-28
360mm	GRANULAR 'A'

NOTES:

1. MULTI-USE PATHS SHALL BE DESIGNED PER SECTION 3.10 OF THE CITY OF OSHAWA'S ENGINEERING DESIGN GUIDELINES.
2. GUARD RAILS SHALL BE REQUIRED AND INSTALLED AS PER THE CRITERIA LISTED ON OS-223.
3. MAXIMUM LONGITUDINAL SLOPE OF THE TRAIL SHALL BE 5%, UNLESS APPROVED BY THE CITY.
4. ASPHALT SURFACE TO BE IN ACCORDANCE WITH THE LATEST VERSION OF THE CITY OF OSHAWA'S DESIGN CRITERIA MANUAL. WHERE APPLICABLE ASPHALT EDGE TO BE 45° HAND TAMPED SMOOTH EDGE WITHOUT LATERAL DEVIATIONS.
5. GRANULAR BASE MATERIAL SHALL BE IN ACCORDANCE WITH O.P.S.S. 1010 AND CITY OF OSHAWA DESIGN CRITERIA.
6. 3.0m WILL BE THE STANDARD WIDTH; WHERE CONSTRUCTING WITHIN EXISTING RESTRICTED CONDITIONS WIDTH MAY BE REDUCED UPON APPROVAL BY CITY OF OSHAWA.
7. A 10cm WIDE PAINTED YELLOW LINE TO BE PROVIDED DOWN CENTRE OF PATH.
8. MEASUREMENTS IN METRES AND/OR MILLIMETRES UNLESS OTHERWISE SHOWN.
9. PLEASE REFER TO PARKS STANDARD P-101 FOR TRAILS AND PATHS NOT CONTAINED WITHIN THE RIGHT-OF-WAY.

FOR BOULEVARD GRADING BEHIND THE MUP, REFER TO DETAIL OS-223

CITY OF OSHAWA

CHK'D: *S.S.*
APP'D: *S.H.*
DATE: APRIL 2024

ASPHALT MULTI-USE PATH (MUP) WITHIN THE RIGHT-OF-WAY

REVISION No. 5

DATE: FEB. 2026

OS-306