



City of Prince Albert

Public Works Department
1084 Central Avenue
Prince Albert, SK S6V 7P3
Phone: (306) 953-4900
Fax: (306) 953-4915

September 23, 2026

9 Street East (4-6 Avenue) & 4 Avenue East (8-10 Street) – Project Update

The City of Prince Albert Public Works Department would like to provide residents and businesses with an update regarding the Capital Utility & Paving Project currently underway in your area.

Watermain Rehabilitation

The structural relining of approximately 545 meters of 150 mm cast iron watermain has been substantially completed. This rehabilitation work has renewed the existing watermain and extended its service life while reducing the amount of construction typically associated with conventional watermain replacement.

As part of the commissioning process, a limited number of water service connections have been identified as requiring additional repairs. Throughout the week of **September 28, 2026**, contractors will return to the project area to complete these localized repairs.

Residents may experience temporary parking restrictions, traffic disruptions, or driveway access interruptions near active work locations. Every effort will be made to minimize impacts and restore access as quickly as possible.

Drinking Water Advisory

Properties currently connected to the temporary water supply system will remain under a Drinking Water Advisory while the remaining watermain repairs are completed. Once the repairs are finished, the City will conduct the required bacteriological testing. The Advisory will be lifted as soon as testing confirms that the water is safe for consumption and meets all applicable drinking water quality requirements.

Sanitary Sewer Relining

The sanitary sewer rehabilitation portion of the project is currently underway. This work involves the trenchless relining of approximately 468 meters of existing vitrified clay sanitary sewer using cured-in-place pipe (CIPP) technology.

Residents may continue to see contractor activity within the project area while this work progresses. Short-duration service interruptions may be required during the reinstatement of sewer service connections. Affected properties will be notified directly by the contractor in advance of any planned interruption.

Road Rehabilitation

Roadway rehabilitation originally planned as a subsequent phase of this project has been deferred to the 2027 construction season. While permanent roadway restoration was anticipated as part of the 2026 construction program, the remaining time available within the current construction season may not be sufficient to complete the work. Deferring the roadway rehabilitation to 2027 will help ensure the work can be completed under suitable construction conditions and allow for a coordinated, long-term restoration of the project area.

In the interim, excavation locations and access pits will be restored with temporary surface treatments, including asphalt millings and temporary asphalt patching where appropriate. Residents should expect to see patched areas and surface variations within the project area through the winter months. These temporary restorations are intended to maintain safe vehicle and pedestrian access until permanent roadway rehabilitation is completed in 2027.


Additional information regarding the roadway rehabilitation program will be provided prior to construction in 2027. If you require further information with respect to this matter, please do not hesitate to contact Public Works at (306) 953-4884. For more information on this project or any other capital projects throughout the city, please visit www.citypa.ca/capital-projects/.

Yours truly,



Digitally signed by Evan
Hastings
Date: 2026.09.23
15:01:08-06'00'

Evan Hastings, P. Eng,
Capital Projects Manager

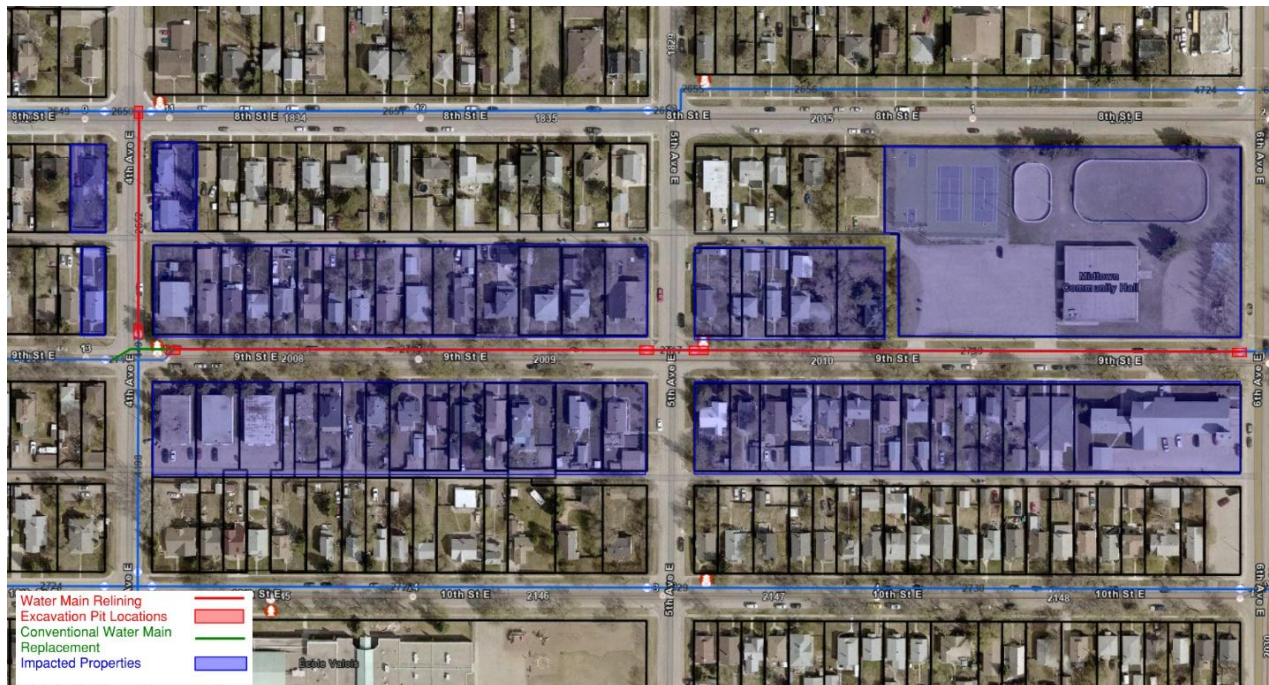

IMPORTANT NOTICE