



Public Information Centre
November 12, 2025



GFT


WELCOME

City of Oshawa

Stevenson Road North Reconstruction
From Taunton Road West to Conlin Road West

PURPOSE OF THE PIC

- Project Background
- Project Location & Scope of Work
- Benefits to the Community
- Project Timeline
- Other Community Updates
- Public Engagement & Feedback

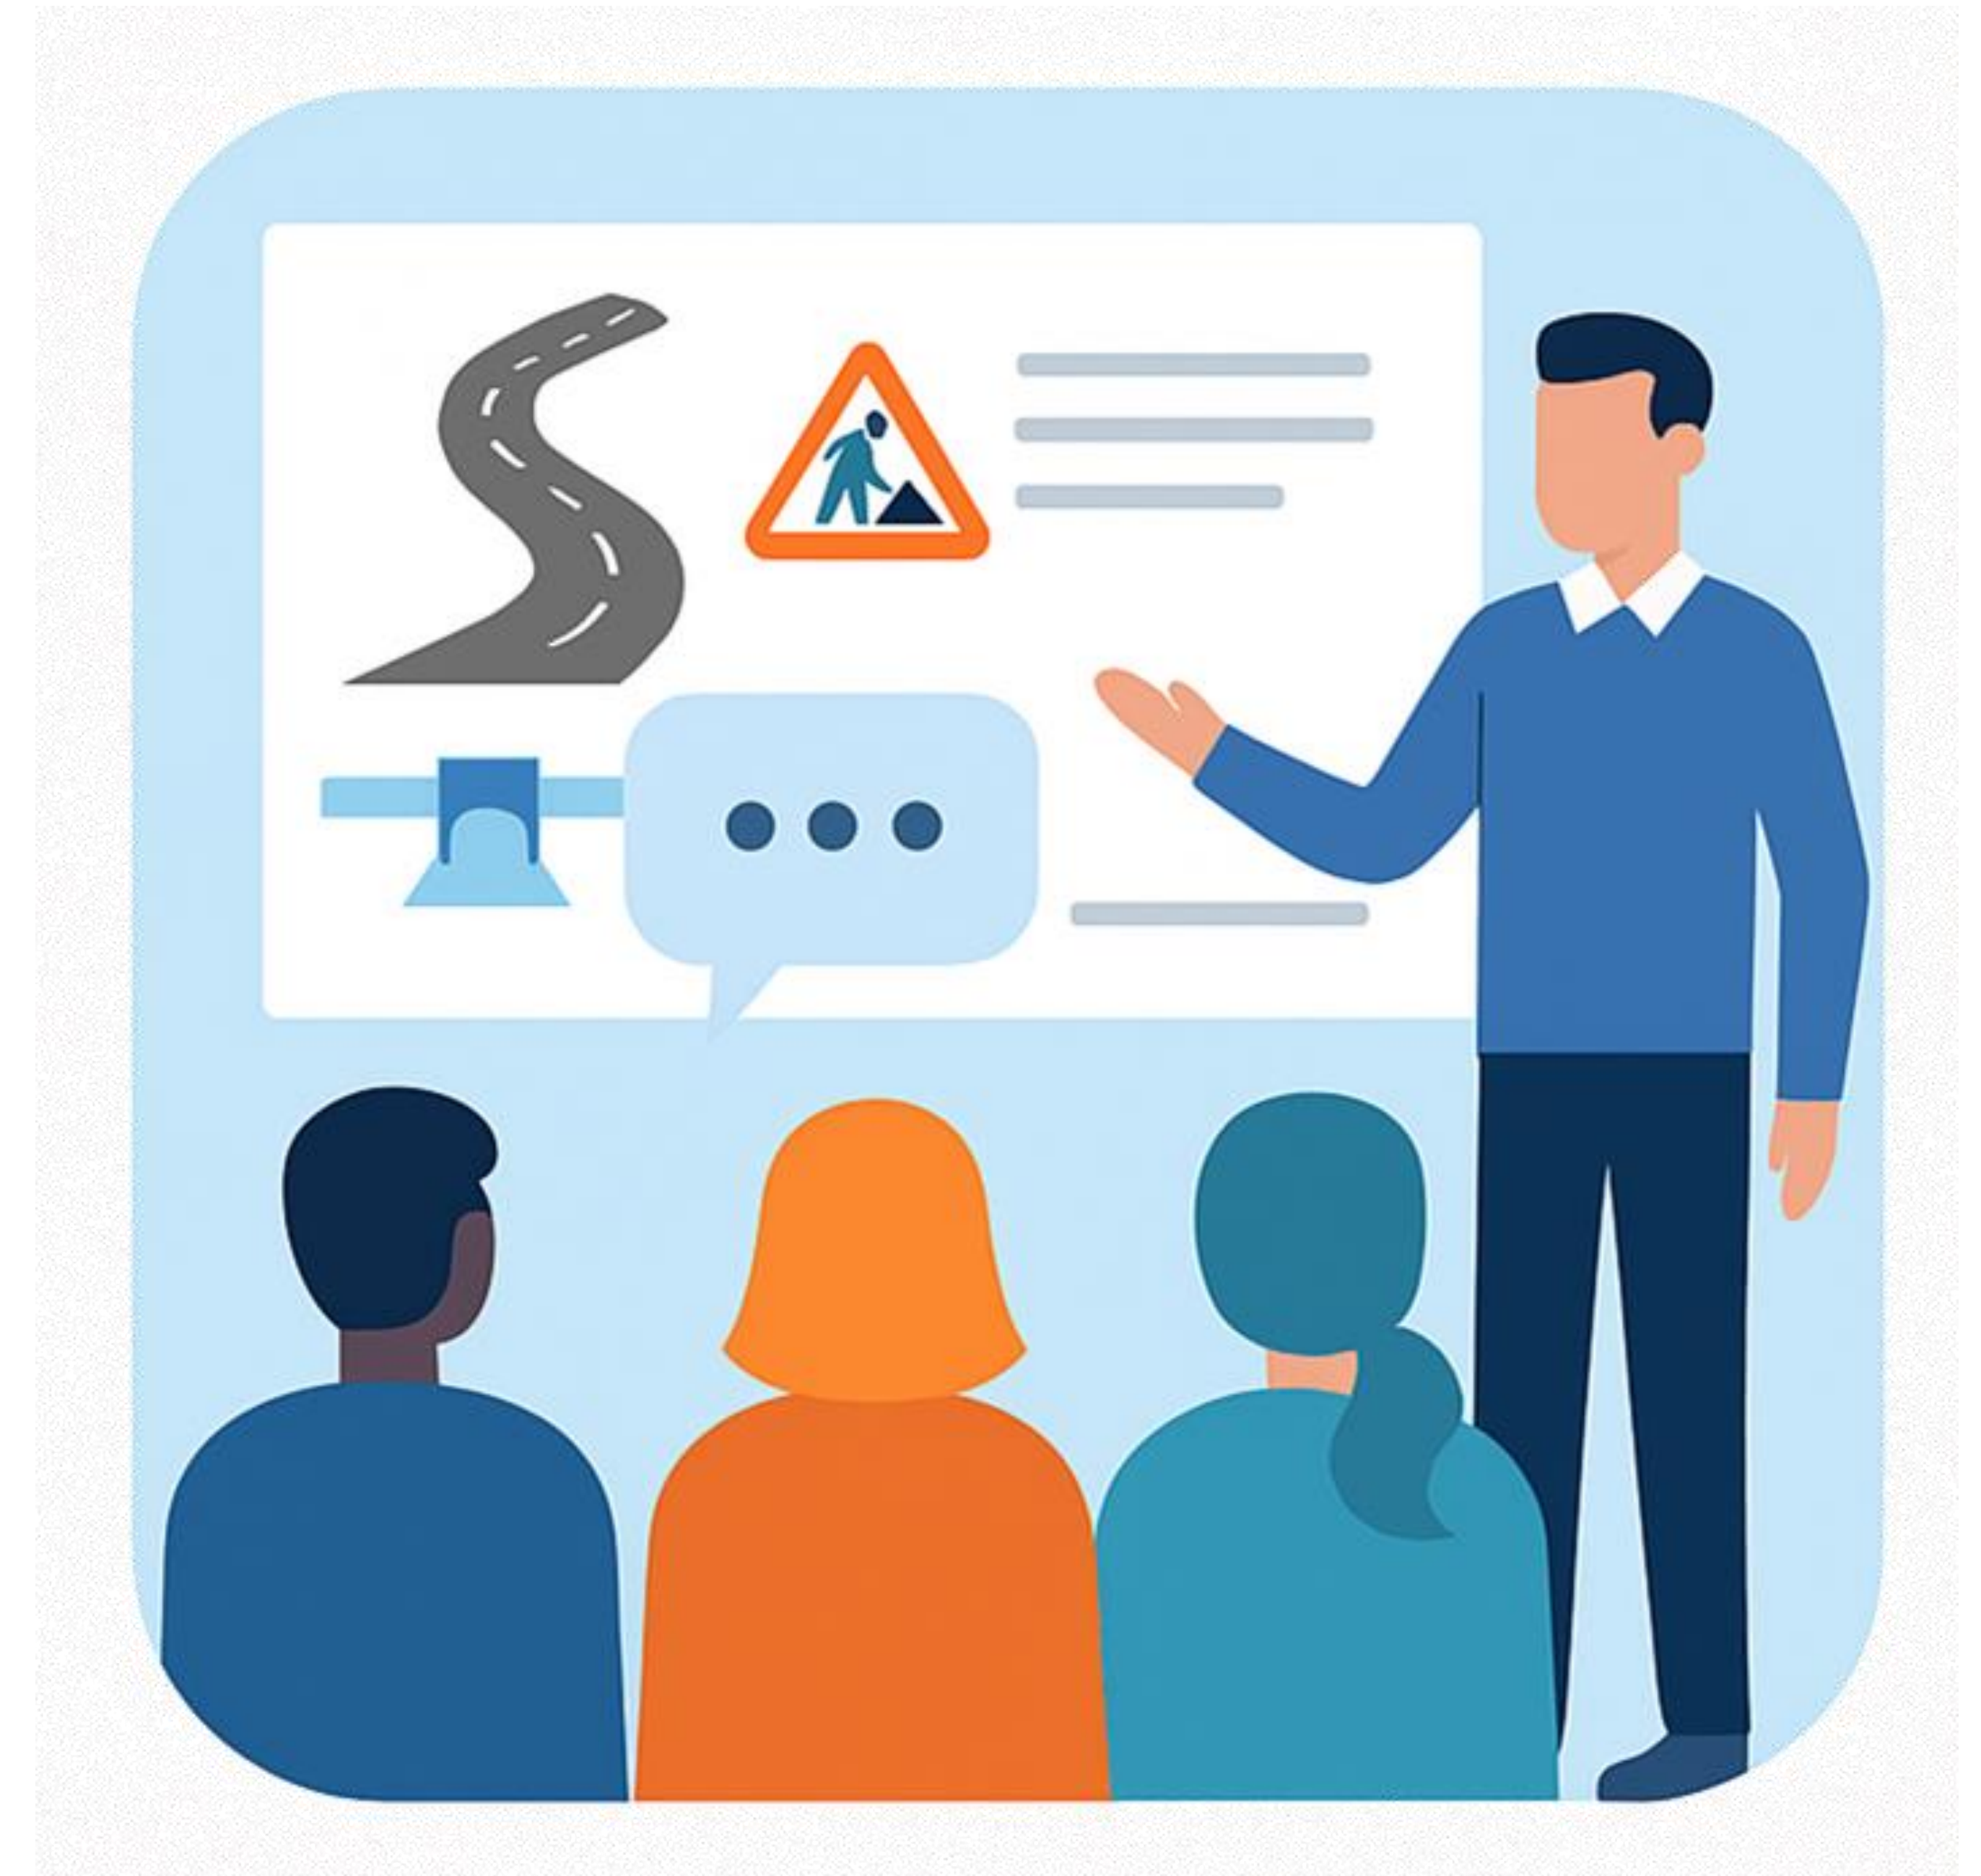

PROJECT BACKGROUND

- Stevenson Road North Environmental Assessment (EA) completed in 2025 in accordance with Municipal Class Environmental Assessment (2023, updated February 2024) as a Schedule 'C' project. Schedule "C" projects involve the completion of Phases 1 to 4 of the EA process.
- Phase 5 of the EA process - Implementation is being completed through the detailed design phase
- Supported by extensive public, stakeholders and Indigenous consultation
- What we heard from you:
 - Support for a multi-use path (MUP)
 - Support for new municipal infrastructures (storm sewer, sanitary sewer and watermain)
 - Desire to minimize environmental impacts and preserve developable industrial land.




Stevenson Road North - Looking North

PROJECT LOCATION & SCOPE OF WORK

The City of Oshawa is completing the detailed design for the reconstruction of Stevenson Road North, from Taunton Road West to Conlin Road West.

- Full depth road reconstruction along Stevenson Road North.
- Safety enhancements through adjustments to the vertical alignment.
- Urbanization including curb & gutter and new storm sewer infrastructure.
- Stormwater management features such as infiltration chambers and flat-bottom ditches.
- Multi-use path on the east side of Stevenson Road North from Taunton Road West to Conlin Road West, including cross-rides at the Taunton Road West and Conlin Road West intersections.
- Upgrades to streetlighting.
- New watermain and sanitary sewer infrastructure.
- Tie into existing/proposed conditions of developments along Stevenson Road North.

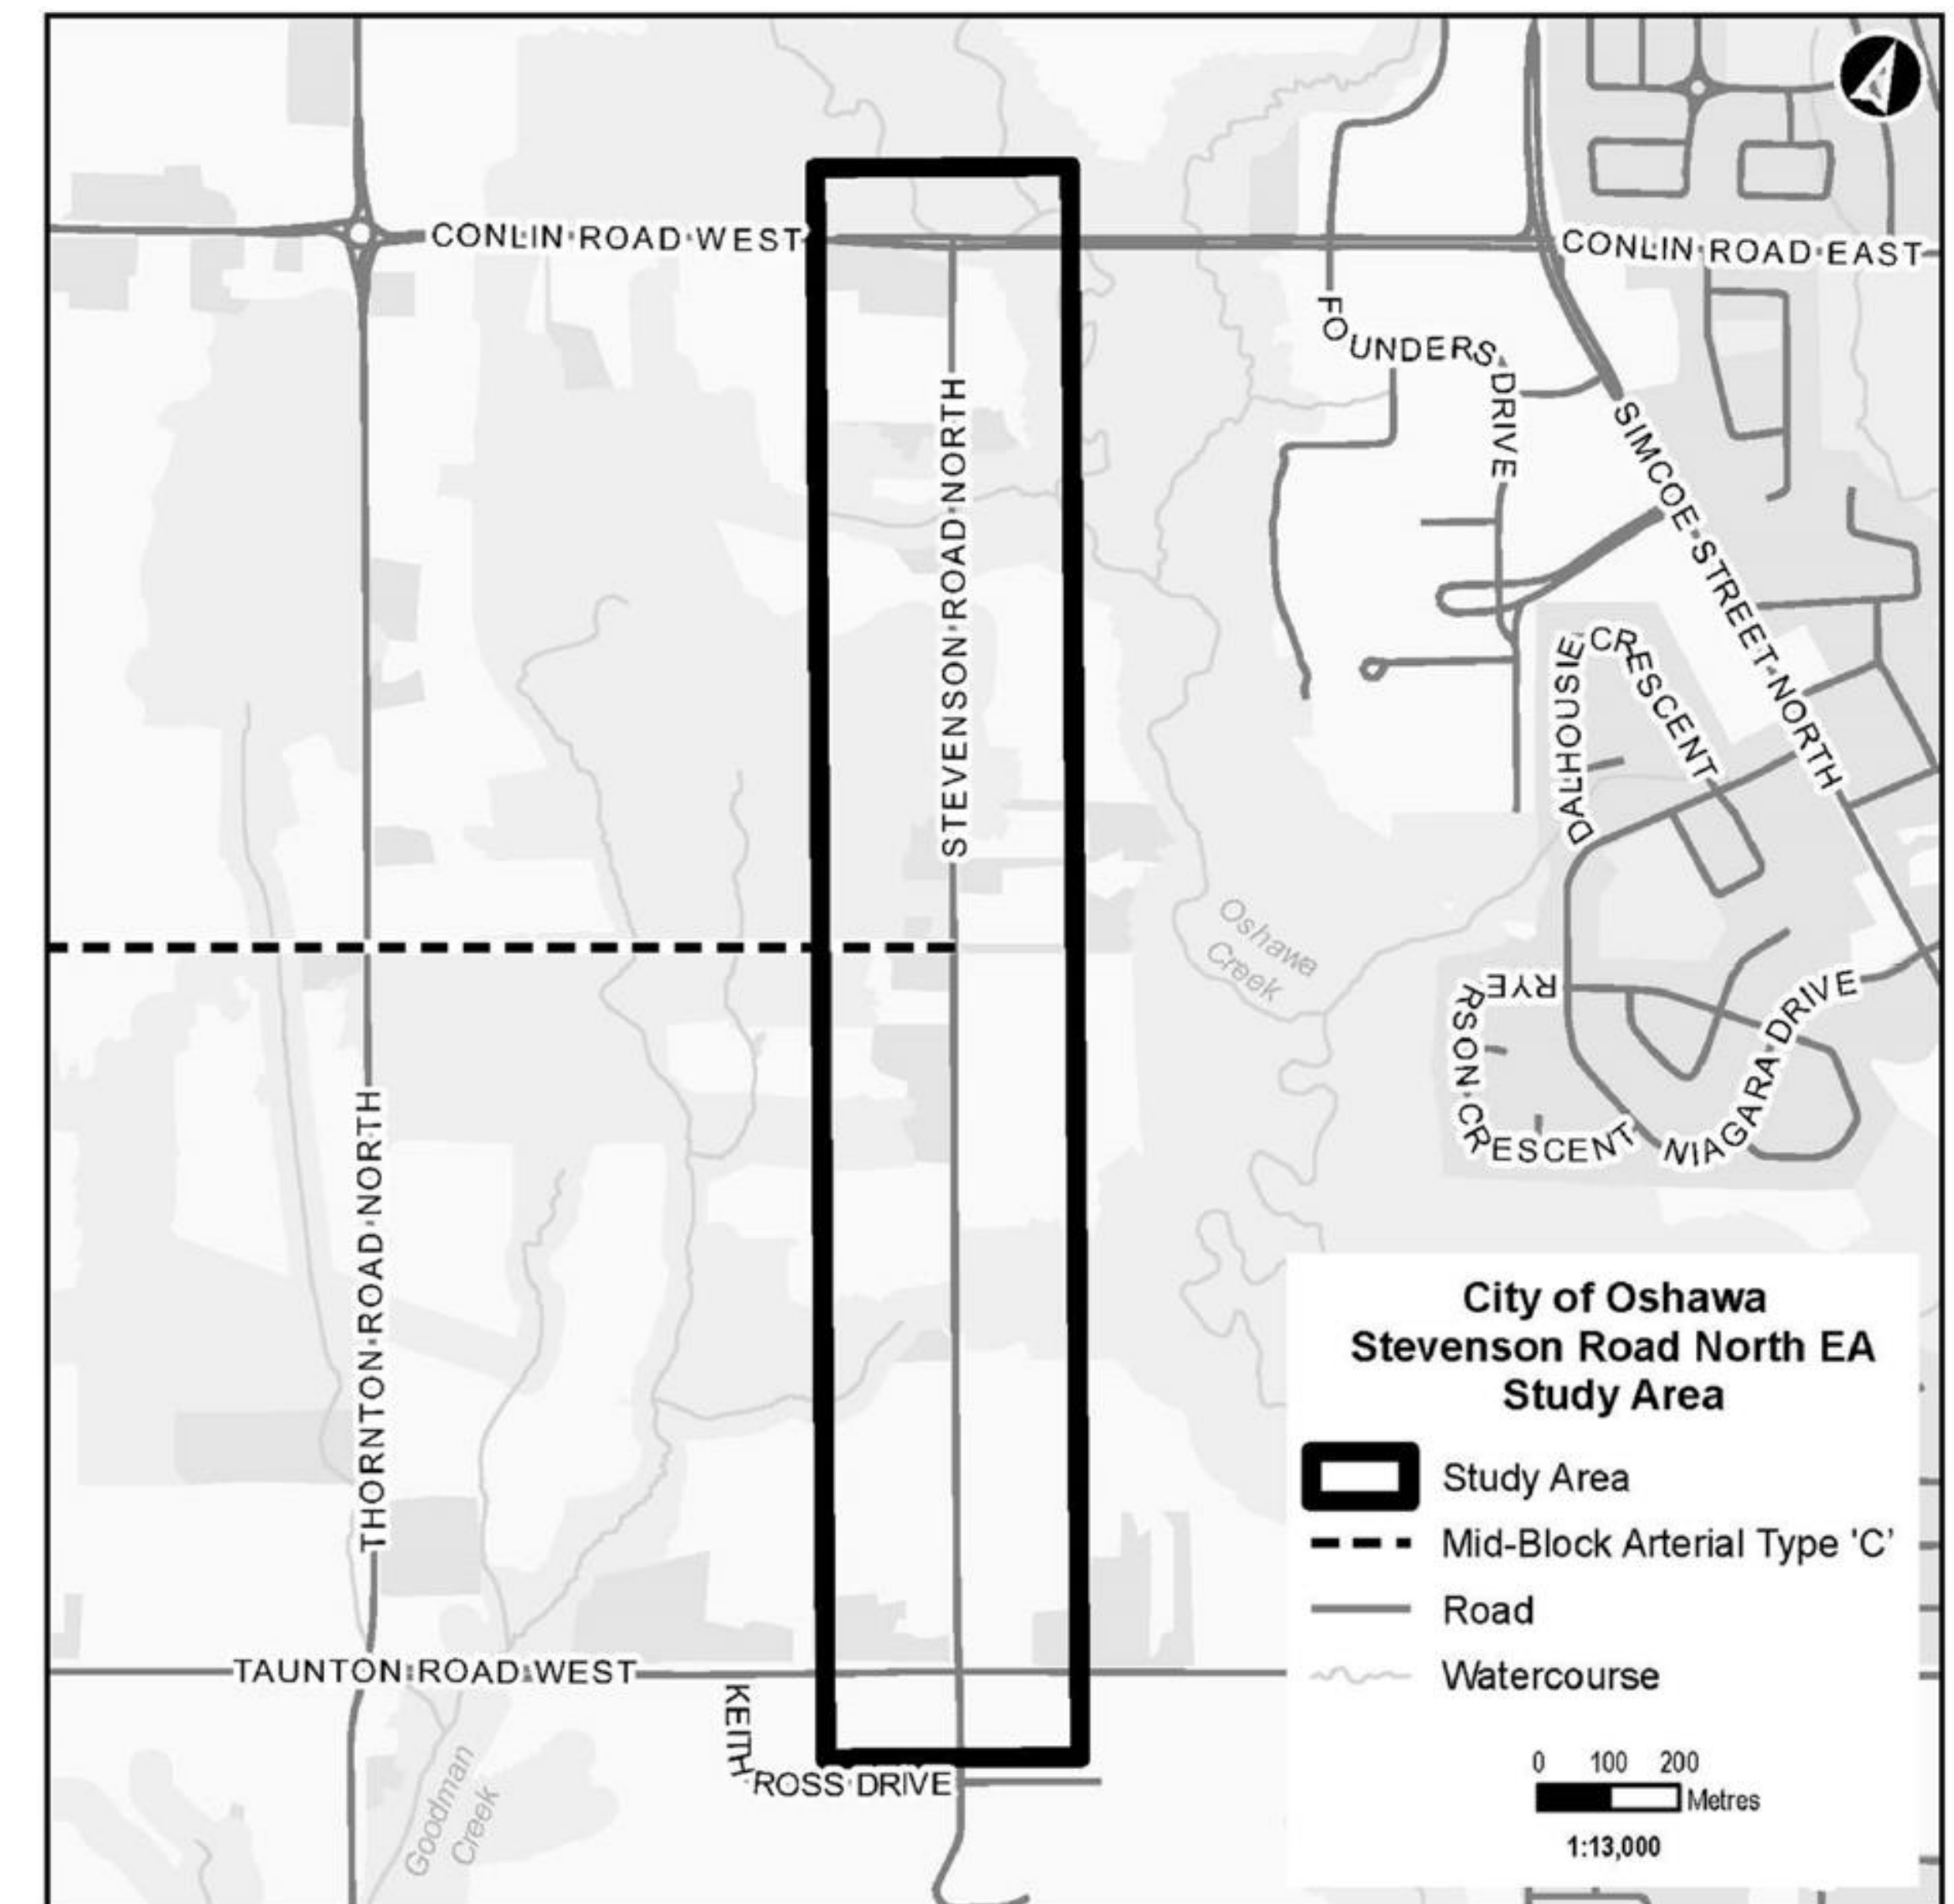

BENEFITS TO THE COMMUNITY

- **Enhanced accessibility and safety**

- New curb and gutter along both sides of the roadway
- New multi-use path on the east side for connectivity and accessibility
- Sightline improvements, particularly near the watercourse crossing
- Relocation of bell and hydro poles to improve roadside safety
- A dedicated left-turn lane on Airport Boulevard improves lane balancing and efficiency at the Taunton Road West intersection
- Upgraded streetlighting to enhance the experience for both drivers and pedestrians

- **New infrastructure to improve reliability of services**

- New storm sewer and low impact development measures
- New sanitary sewer
- New watermain
- Modern infrastructure improves operational efficiency for City services

BENEFITS TO THE COMMUNITY (CONT'D)

- **Roadway Upgrades and Pavement Renewal**

- Reconstruction of the deteriorated roadway surface ensures a smoother, more comfortable, and safer driving experience.
- Wider lanes and delineated pavement markings improve the overall functionality of the road.

- **Stormwater Management Improvements**

- Replacement of existing driveway culverts with storm sewers/structures enhances flood protection and improves drainage capacity.
- Upgraded roadside ditches and stormwater infrastructure contribute to reduced surface water pooling, minimizing maintenance needs and potential hazards.

- **Environmental Protection**

- Preserves natural heritage features and mature trees where possible.

- **Supports future growth**

- Preserves developable industrial land.

- **Community Resilience & Sustainability**

- Incorporates climate-resilient design and infrastructure.
- Supports long-term planning goals for complete, connected, and livable communities.

PROJECT TIMELINES

- Q1 2026 - Obtain Budget Approval by City Council
- Q1/Q2 2026 - Tree Pruning/Removals to prepare for Construction works
- Q1/Q2 2026 - Utility Relocation (Bell, Rogers, Oshawa Power and Utilities Corporation & Enbridge)
- Q2/Q3 2026 - Procure a Contractor and Commence Stevenson Road North Infrastructure Upgrades
- Q2/Q3 2027 - Construction Completion

Approximate timelines based on our current project schedule and may be subject to change



PUBLIC ENGAGEMENT AND FEEDBACK

We want to hear from you!

If you have any further questions or comments, please contact:

Evan Woodcock

Infrastructure Delivery Project Manager

City of Oshawa

Tel: 905-436-3311 ext. 2377

Email: EWoodcock@oshawa.ca

Alex Doran

Project Engineer

Water and Wastewater Infrastructure

Design Division

The Regional Municipality of Durham

Tel: M: 289-830-7689

Email: Alex.Doran@durham.ca

Catherine Voytenkov

Senior Project Manager

Gannett Fleming

Tel: 416-669-5246

Email: cvoytenkov@gftinc.com



Subscribe for Project updates at
<https://www.oshawa.ca/city-hall/major-construction-and-renewal-projects/>
or scan the QR Code



Public Information Centre
November 12, 2025



THANK YOU
